



Valeo-BP 35/60 K

Mono-pipe ventilation exhaust centrifugal fans


- Maximum airflow: 63
- Sound pressure level LpA at 3 m: 36
- Control: Wired control panel
- Casing material: Plastic
- Backdraft protection: Backdraft damper

| | Unit of measurement | Valeo-BP 35/60 K | |
|---------------------------------|---------------------|------------------|------|
| Connected air duct size | mm | 80 | |
| Speed | - | 2 | |
| Minimum supply voltage | V | 220 | |
| Maximum supply voltage | V | 240 | |
| Power supply frequency | Hz | 50 | |
| Rated power | W | 15 | 25 |
| Unit current | A | 0.12 | 0.14 |
| Maximum airflow | m ³ /h | 35 | 63 |
| Sound pressure level LpA at 3 m | dB(A) | 27 | 36 |
| Weight | kg | 2.7 | |
| Ambient air temperature min | °C | 1 | |
| Ambient air temperature max | °C | 40 | |
| Ingress protection rating | - | IP55 | |

Dimensions



Ecodesign

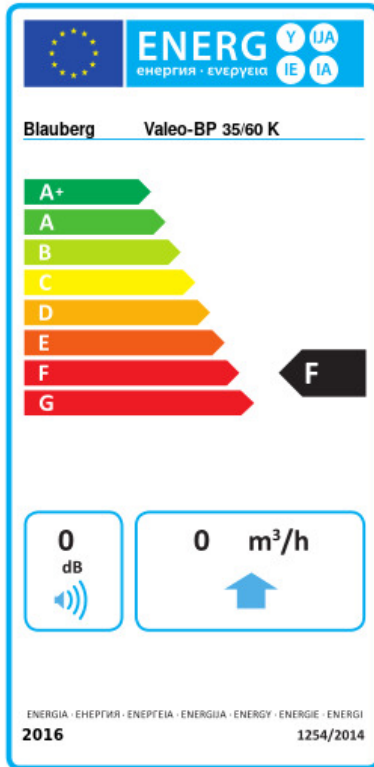

| | | | |
|---|------------------|---------|------|
| Trademark | Blauberg | | |
| Model | Valeo-BP 35/60 K | | |
| Specific energy consumption (SEC) (kWh/(m ² /a)) | Cold | Average | Warm |
| | 0 D | 0 F | 0 G |
| Type of ventilation unit | Unidirectional | | |
| Type of drive installed | 2-speed | | |
| Type of heat recovery system | None | | |
| Maximum flow rate (m ³ /h) | 0 | | |
| Electric power input (W) | 0 | | |
| Reference flow rate (m ³ /s) | 0 | | |
| Reference pressure difference (Pa) | 0 | | |
| Specific power input (SPI) (W/(m ³ /h)) | 0 | | |
| Control typology | Manual control | | |
| Maximum external leakage rates (%) | 0 | | |
| Sound power level (dB(A)) | 0 | | |
| Declared typology | RVU UVU | | |
| The annual electricity consumption (AEC) (kWh/a) | Cold | Average | Warm |
| | 0 | 0 | 0 |
| The annual heating saved (AHS) (kWh/a) | Cold | Average | Warm |
| | 0 | 0 | 0 |

Accessories

Speed control switches

| Name | Photo | Description |
|-------------------------|-------|--------------------|
| CDP-3/5 | | Multi-speed switch |