



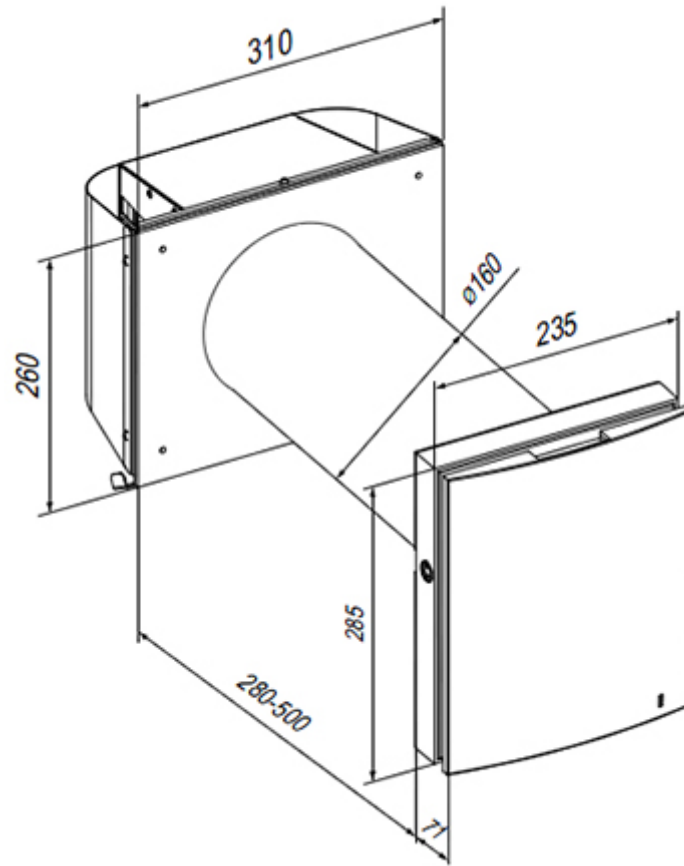
VENTO Expert Duo A30-1 Pro

Heat recovery single-room units

- Air flow in heat recovery mode: 10
- Sound pressure level LpA at 3 m: 34
- Sound pressure level LpA at 1 m: 43
- Heat exchanger type: Reversible
- Sound insulation
- Motor type: EC
- Control: Remote Control
- Casing material: Plastic
- Humidity sensor: Optional
- CO2 sensor: Optional
- VOC sensor: Optional
- PM2.5 sensor: Optional



| | Unit of measurement | VENTO Expert Duo A30-1 Pro | | |
|-----------------------------------|---------------------|----------------------------|-------|-------|
| Speed | - | 3 | | |
| Minimum supply voltage | V | 100 | | |
| Maximum supply voltage | V | 240 | | |
| Power supply frequency | Hz | 50/60 | | |
| Rated power | W | 2.00 | 3.70 | 6.40 |
| Unit current | A | 0.027 | 0.043 | 0.067 |
| Air flow in ventilation mode | m ³ /h | 10 | | |
| Air flow in heat recovery mode | m ³ /h | 10 | | |
| Sound pressure level LpA at 3 m | dB(A) | 24 | 31 | 34 |
| Sound pressure level LpA at 1 m | dB(A) | 33 | 40 | 43 |
| Heat recovery efficiency, max | % | 85 | | |
| Heat exchanger type | - | Reversible | | |
| Transported air temperature (max) | °C | 40 | | |
| Transported air temperature (min) | °C | -15 | | |
| Ambient air temperature min | °C | 1 | | |
| Ambient air temperature max | °C | 40 | | |
| Ambient air humidity max | % | 65 | | |
| Ingress protection rating | - | IP24 | | |

Dimensions



Accessories

Other accessories

| Name | Photo | Description |
|----------------------|---|-------------|
| CD-1 |  | CO2 sensors |
| CD-2 |  | CO2 sensors |