



## Wind-K 125 S


Window extract fans

- Maximum airflow: 185
- Sound pressure level LpA at 3 m: 35
- Motor type: AC
- Casing material: Plastic
- Pull cord

|                                 | Unit of measurement | Wind-K 125 S |
|---------------------------------|---------------------|--------------|
| Connected air duct size         | mm                  | 125          |
| Speed                           | -                   | 1            |
| Minimum supply voltage          | V                   | 220          |
| Maximum supply voltage          | V                   | 240          |
| Power supply frequency          | Hz                  | 50           |
| Rated power                     | W                   | 22           |
| Unit current                    | A                   | 0.1          |
| Maximum airflow                 | m <sup>3</sup> /h   | 185          |
| rotation speed at 50hz          | -                   | 2400         |
| Sound pressure level LpA at 3 m | dB(A)               | 35           |
| Ambient air temperature min     | °C                  | 1            |
| Ambient air temperature max     | °C                  | 40           |
| Ingress protection rating       | -                   | IP24         |

### Dimensions

| a   | b   | g   | h   |
|-----|-----|-----|-----|
| 186 | 173 | 183 | 160 |

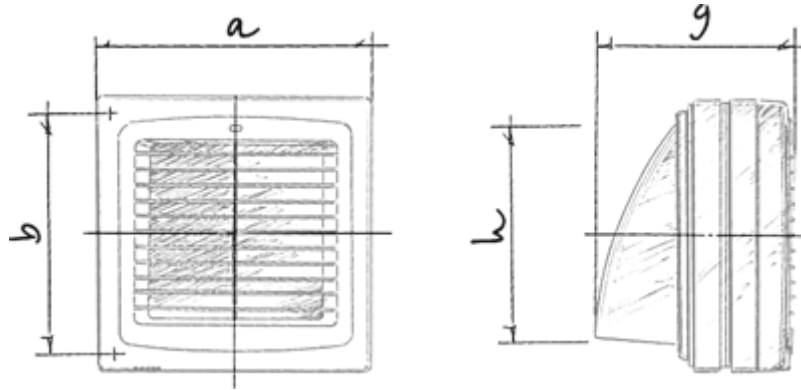


## Ecodesign



|   |                |   |         |   |      |   |
|---|----------------|---|---------|---|------|---|
| Trademark   | Blauberg       |   |         |   |      |   |
| Model   | Wind-K 125 S   |   |         |   |      |   |
| Specific energy consumption (SEC) (kWh/(m <sup>2</sup> /a)) | Cold           |   | Average |   | Warm |   |
|   | 0              | B | 0       | E | 0    | F |
| Type of ventilation unit                                    | Unidirectional |   |         |   |      |   |
| Type of drive installed                                     | Multi-speed    |   |         |   |      |   |
| Type of heat recovery system                                | None           |   |         |   |      |   |
| Maximum flow rate (m <sup>3</sup> /h)                       | 0              |   |         |   |      |   |
| Electric power input (W)                                    | 0              |   |         |   |      |   |
| Reference flow rate (m <sup>3</sup> /s)                     | 0              |   |         |   |      |   |
| Specific power input (SPI) (W/(m <sup>3</sup> /h))          | 0              |   |         |   |      |   |
| Control typology  | Manual control |   |         |   |      |   |
| Maximum external leakage rates (%)                          | 0              |   |         |   |      |   |
| Airflow sensitivity at +20 Pa and -20 Pa (%)                | 0              |   |         |   |      |   |
| The indoor/outdoor air tightness (m <sup>3</sup> /h)        | 0              |   |         |   |      |   |
| Sound power level (dB(A))                                   | 0              |   |         |   |      |   |
| Declared typology   | RVU UVU        |   |         |   |      |   |
| The annual heating saved (AHS) (kWh/a)                      | Cold           |   | Average |   | Warm |   |
|   | 0              |   | 0       |   | 0    |   |

## Accessories

### Other accessories

| Name                     | Photo   | Description                |
|--------------------------|---|----------------------------|
| <a href="#">CDT E1.8</a> |  | Thyristor speed controller |