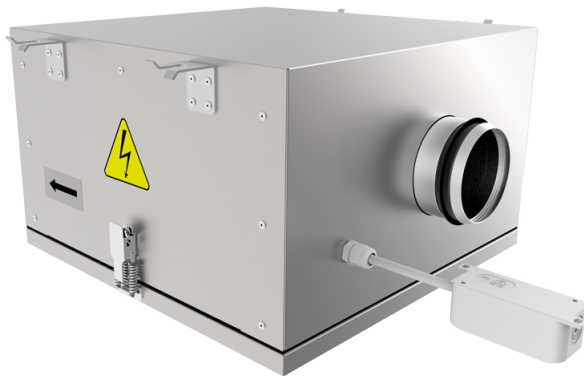













ISO-RB EC

Centrifugal inline fans with backward curved blades in cases with improved sound insulation properties with EC-motors

- Sound insulation
- Motor type: EC
- Impeller type: Centrifugal backward curved blades
- Casing material: Aluzinc



Lineup	Connected air duct size, mm	Rated power, W	Maximum airflow, m ³ /h
 ISO-RB EC 100	100	69	341
 ISO-RB EC 125	125	78	444
 ISO-RB EC 150	150	81	495
 ISO-RB EC 160	160	85	454
 ISO-RB EC 200	200	111	740
 ISO-RB EC 250	250	164	1099
 ISO-RB EC 315	315	531	3053

 ISO-RB EC 355	355	527	3417
 ISO-RB EC 400	400	513	3633
 ISO-RB EC 450	450	1200	5620
 ISO-RB EC 500	500	752	7145