






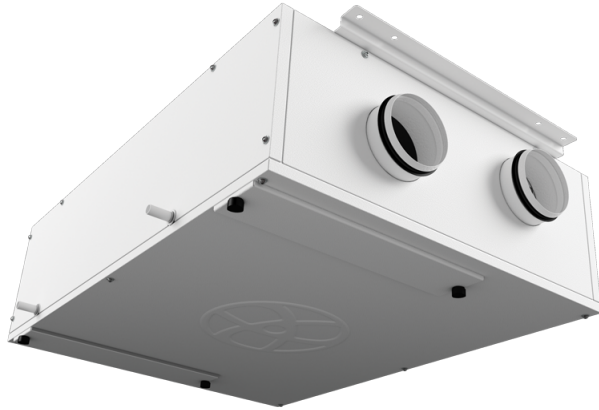


# KOMFORT EC DB

Suspended heat recovery air handling units



- Heat exchanger type: Counter flow
- Sound insulation
- Motor type: EC
- Bypass: Manual
- Reheater: Optional
- Preheater: Optional
- BMS protocol: ModBus
- Control: Wired control panel
- Casing material: Galvanized steel
- Humidity sensor: Optional

Lineup	Connected air duct size, mm	Rated power, W	Maximum airflow, m <sup>3</sup> /h	Service side	Control system	Reheater	Preheater	BMS protocol
 KOMFORT EC DB 160 R S21	125	50	190	Right	S21	Optional	Optional	ModBus
 KOMFORT EC DB 160 L S21	125	50	190	Left	S21	Optional	Optional	ModBus
 KOMFORT EC DB 160 R S14	125	50	190	Right	S14	✗	✗	✗
 KOMFORT EC DB 160 L S14	125	50	190	Left	S14	✗	✗	✗
 KOMFORT EC DB 250 R S21	125	101	270	Right	S21	Optional	Optional	ModBus
 KOMFORT EC DB 250 L S21	125	101	270	Left	S21	Optional	Optional	ModBus
 KOMFORT EC DB 250 R S14	125	101	270	Right	S14	✗	✗	✗

 KOMFORT EC DB 250 L S14	125	101	270	Left	S14	×	×	×
 KOMFORT EC DB 350 R S21	160	170	410	Right	S21	Optional	Optional	ModBus
 KOMFORT EC DB 350 L S21	160	170	410	Left	S21	Optional	Optional	ModBus
 KOMFORT EC DB 350 R S14	160	170	410	Right	S14	×	×	×
 KOMFORT EC DB 350 L S14	160	170	410	Left	S14	×	×	×