




BLAUBOX DW 3200-4 Pro

Supply suspended ventilation units


- Maximum airflow: 3260
- Sound pressure level LpA at 3 m: 57
- Sound insulation
- Motor type: AC
- Reheater: Water
- Control: Remote Control
- Casing material: Galvanized steel

	Unit of measurement	BLAUBOX DW 3200-4 Pro
Connected air duct size	mm	600x350
Speed	-	1
Minimum supply voltage	V	400
Maximum supply voltage	V	400
Power supply frequency	Hz	50
Rated power	W	1330
Unit current	A	2.4
Maximum airflow	m ³ /h	3260
Sound pressure level LpA at 3 m	dB(A)	57
Weight	kg	94
Transported air temperature (max)	°C	45
Transported air temperature (min)	°C	-25
Ambient air temperature min	°C	-25
Ambient air temperature max	°C	45
Ambient air humidity max	%	80
Ingress protection rating	-	IP22
Ingress protection rating of the drive	-	IP44

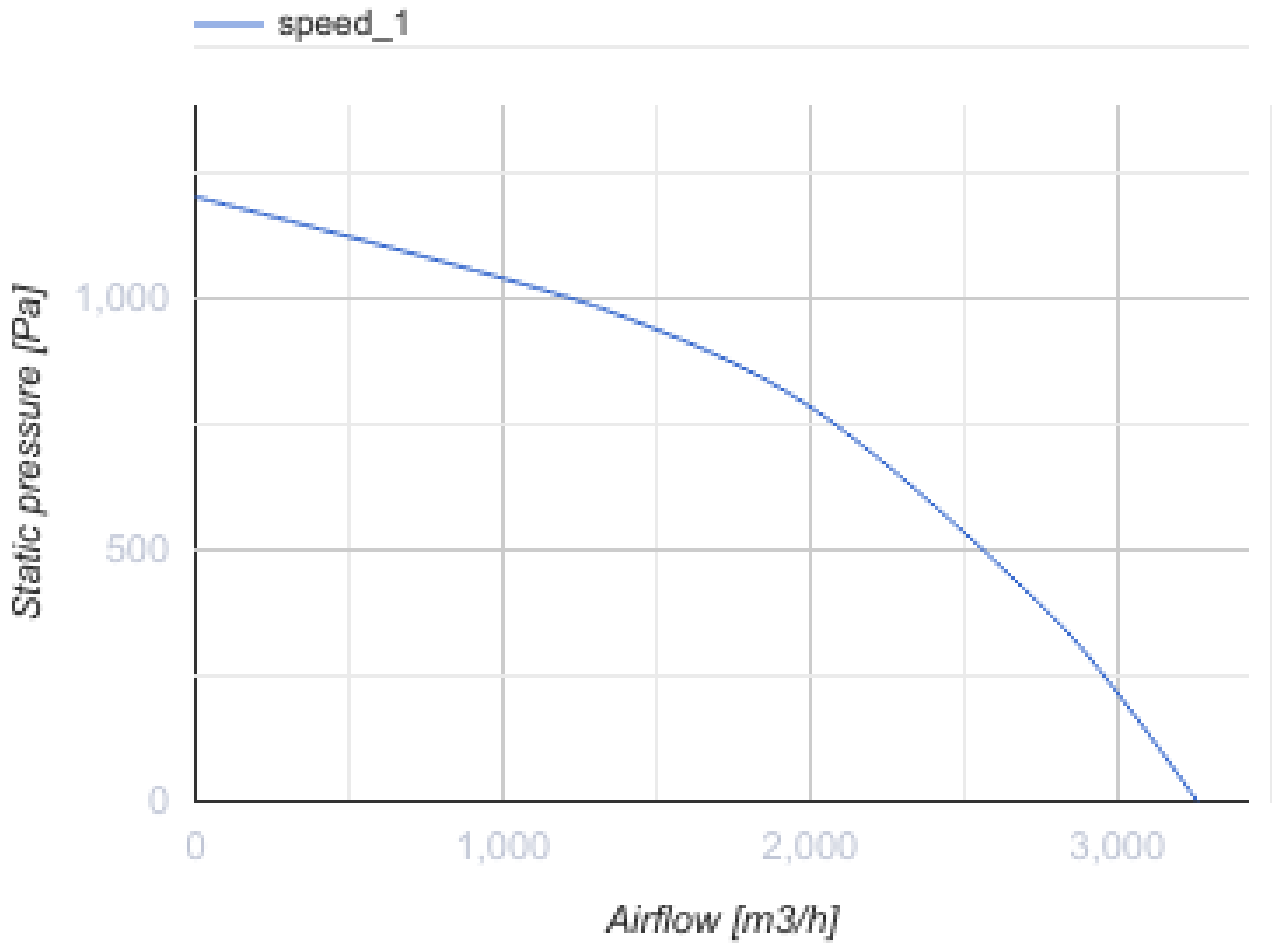

Dimensions

B	B1	B2	B3	H	H1	H2	L	L1
600	620	787	744	350	370	500	1252	1212

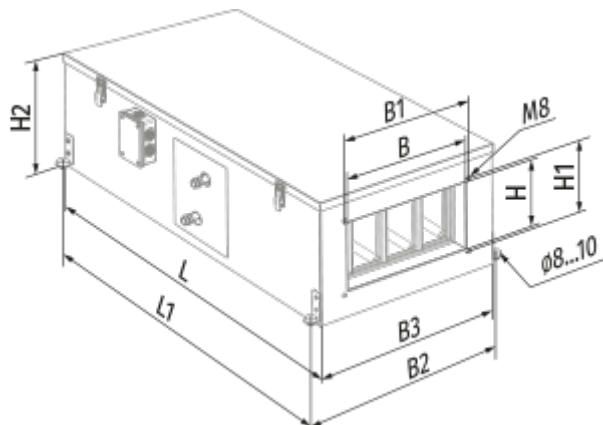


Accessories


Other accessories

Name	Photo	Description
FPT 637x395x27 G4		

For rectangular ducts

Name	Photo	Description
SD 60x35		Silencers for rectangular ducts






Freon coolers






Name	Photo	Description
KFK 60x35-3		Duct DX cooling units for rectangular air ducts

Water coolers

Name	Photo	Description
KWK 60x35-3		Duct water cooling units for rectangular air ducts

Mixing chambers

Name	Photo	Description
WMG 3/4-4		Water mixing units
WMG 3/4-6		Water mixing units
WMG 1-6		Water mixing units
WMG 1-10		Water mixing units
WMG 1 1/4-10		Water mixing units

WMG 1 1/4-16		Water mixing units
WMG 1 1/2-16		Water mixing units
WMG 1 1/2-25		Water mixing units
WMG 2-25		Water mixing units
WMG 2-40		Water mixing units