




BLAUBOX DW 4100-3 Pro

Supply suspended ventilation units


- Maximum airflow: 4100
- Sound pressure level LpA at 3 m: 75
- Sound insulation
- Motor type: AC
- Reheater: Water
- Control: Remote Control
- Casing material: Galvanized steel

	Unit of measurement	BLAUBOX DW 4100-3 Pro
Connected air duct size	mm	700x400
Speed	-	1
Minimum supply voltage	V	400
Maximum supply voltage	V	400
Power supply frequency	Hz	50
Rated power	W	2300
Unit current	A	4.3
Maximum airflow	m ³ /h	4100
Sound pressure level LpA at 3 m	dB(A)	75
Weight	kg	110
Transported air temperature (max)	°C	70
Transported air temperature (min)	°C	-25
Ambient air temperature min	°C	-25
Ambient air temperature max	°C	70
Ambient air humidity max	%	80
Ingress protection rating	-	IP22
Ingress protection rating of the drive	-	IP44

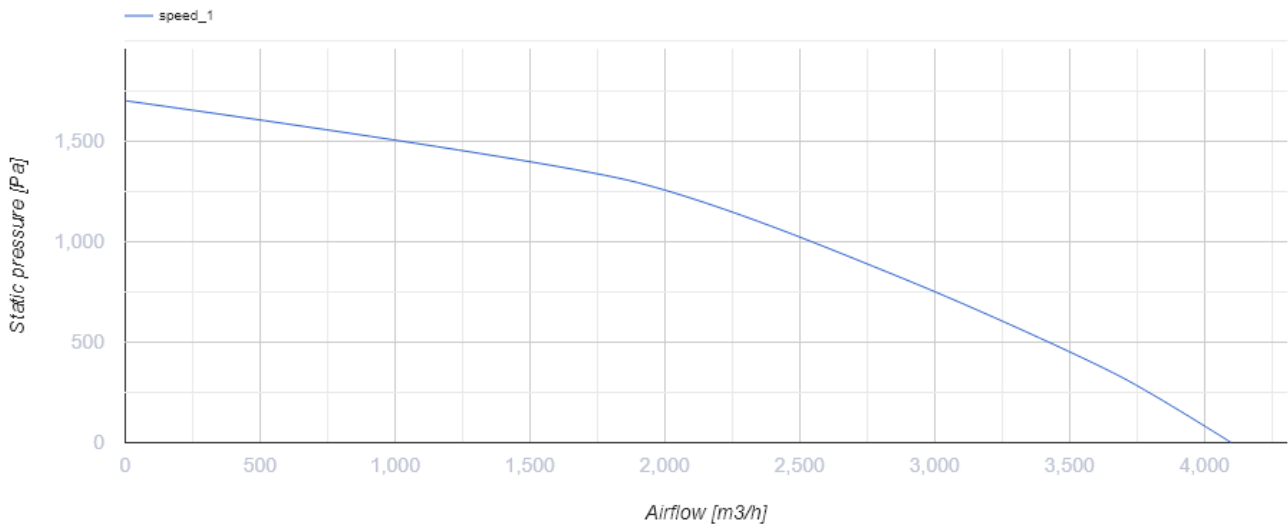

Dimensions

B	B1	B2	B3	H	H1	H2	L	L1
700	720	888	844	400	420	546	1302	1262

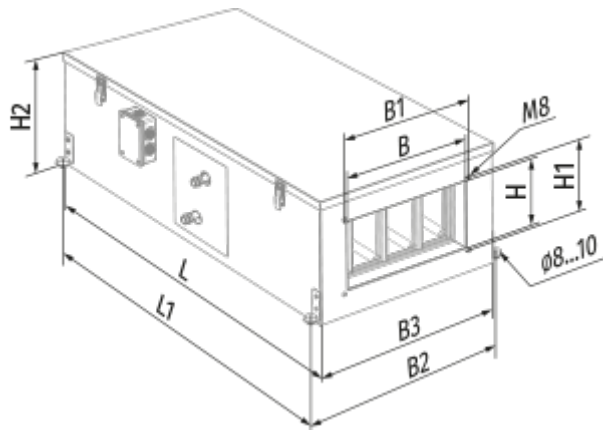


Accessories

Other accessories













Name	Photo	Description
FPT 737x441x27 G4		

Other accessories



Name	Photo	Description
------	-------	-------------

SD 80x50		Silencers for rectangular ducts
--------------------------	---	---------------------------------

Other accessories

Name	Photo	Description
KFK 70x40-3		Duct DX cooling units for rectangular air ducts
KWK 70x40-3		Duct water cooling units for rectangular air ducts
WMG 3/4-4		Water mixing units
WMG 3/4-6		Water mixing units
WMG 1-6		Water mixing units
WMG 1-10		Water mixing units
WMG 1 1/4-10		Water mixing units
WMG 1 1/4-16		Water mixing units
WMG 1 1/2-16		Water mixing units
WMG 1 1/2-25		Water mixing units
WMG 2-25		Water mixing units
WMG 2-40		Water mixing units

Other accessories

Name	Photo	Description
SL 70x40		Air dampers for rectangular ducts
EVA 70x40		Flexible anti-vibration connectors for rectangular ducts