

BLAUBOX ME 3200-25.2 Pro

Supply ventilation units

- Power of electrical reheater: 25200
- Sound pressure level LpA at 3 m: 53
- Sound-insulated casing
- Reheater: Electric
- Control: Remote Control
- Casing material: Galvanized steel

	Unit of measurement	BLAUBOX ME 3200-25.2 Pro
Connected air duct size	mm	600x300
Phases	-	3
Connection type	-	Y
Minimum supply voltage	V	400
Maximum supply voltage	V	400
Power supply frequency	Hz	50
Rated power	W	1270
Power of electrical reheater	W	25200
Unit current	A	38.7
Maximum airflow	m³/h	3200
Rotation speed at 50hz	-	1200
Sound pressure level LpA at 3 m	dB(A)	53
Weight	kg	69.4
Transported air temperature (max)	°C	45
Transported air temperature (min)	°C	-40
Ambient air temperature min	°C	1
Ambient air temperature max	°C	40
Ingress protection rating	-	IP22
Ingress protection rating of the drive	-	IP44
Ambient air humidity max	%	80

Dimensions

B	B1	B2	H	L	L1
710	600	759	530	1000	880

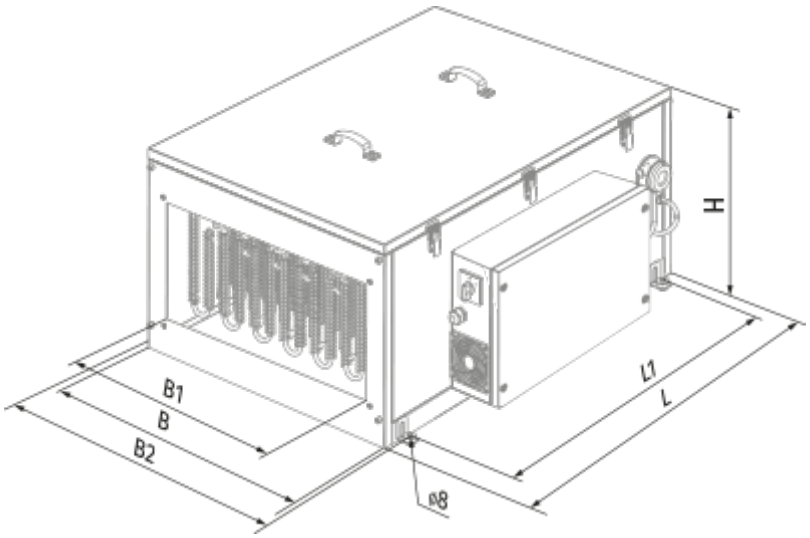

Accessories

For rectangular ducts

Name	Photo	Description
SD 60x30		Silencers for rectangular ducts

For rectangular ducts

Name	Photo	Description
EVA 60x30		Flexible anti-vibration connectors for rectangular ducts

Freon coolers

Name	Photo	Description
KFK 60x30-3		Duct DX cooling units for rectangular air ducts

Airflow regulators

Name	Photo	Description

SL 60x30		Air dampers for rectangular ducts

Other accessories

Name	Photo	Description
FP 653x440x47 G4		G4 panel filter