



BLAUBOX MW 3000-4 Pro


Supply ventilation units

- Maximum airflow: 3000
- Sound pressure level LpA at 3 m: 53
- Sound insulation
- Motor type: AC
- Reheater: Water
- Control: Remote Control
- Casing material: Galvanized steel

	Unit of measurement	BLAUBOX MW 3000-4 Pro
Connected air duct size	mm	600x300
Speed	-	1
Connection type	-	Y
Minimum supply voltage	V	400
Maximum supply voltage	V	400
Power supply frequency	Hz	50
Rated power	W	1270
Unit current	A	2.3
Maximum airflow	m ³ /h	3000
Sound pressure level LpA at 3 m	dB(A)	53
Weight	kg	73.2
Transported air temperature (max)	°C	45
Transported air temperature (min)	°C	-40
Ambient air temperature min	°C	1
Ambient air temperature max	°C	40
Ambient air humidity max	%	80
Ingress protection rating	-	IP22
Ingress protection rating of the drive	-	IP44


Dimensions

B	B2	B3	H	H1	L
710	1000	600	530	300	1000

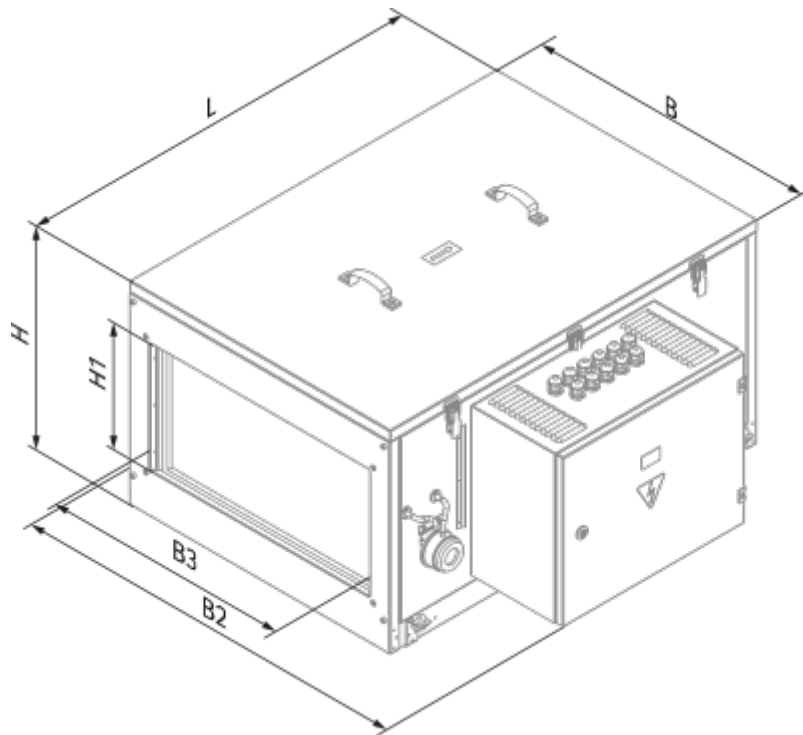


Accessories

Other accessories













Name	Photo	Description
FP 653x440x47 G4		G4 panel filter

Other accessories


Name	Photo	Description
SD 60x30		Silencers for rectangular ducts

Other accessories

Name	Photo	Description
------	-------	-------------

KFK 60x30-3		Duct DX cooling units for rectangular air ducts
KWK 60x30-3		Duct water cooling units for rectangular air ducts
WMG 3/4-4		Water mixing units
WMG 3/4-6		Water mixing units
WMG 1-6		Water mixing units
WMG 1-10		Water mixing units
WMG 1 1/4-10		Water mixing units
WMG 1 1/4-16		Water mixing units
WMG 1 1/2-16		Water mixing units
WMG 1 1/2-25		Water mixing units
WMG 2-25		Water mixing units
WMG 2-40		Water mixing units

Other accessories

Name	Photo	Description
SL 60x30		Air dampers for rectangular ducts

[EVA 60x30](#)



Flexible anti-vibration connectors for rectangular ducts