

# Ceileo 250 Light

Centrifugal extract low-noise and low-watt fans for ceiling mounting




- Sound pressure level LpA at 3 m: 30
- Lighting
- Impeller type: Centrifugal impeller with forward curved blades
- Casing material: Galvanized steel
- Backdraft protection: Backdraft damper


	Unit of measurement	Ceileo 250 Light			
Speed	-	1	2	1	2
Connected air duct size	mm	150/100			
Phases	-	1			
Minimum supply voltage	V	230			
Maximum supply voltage	V	230			
Power supply frequency	Hz	50		60	
Rated power	W	23	39	50	25
Unit current	A	0.12	0.18	0.22	0.14
Maximum airflow	m <sup>3</sup> /h	170	260	270	160
Rotation speed at 50hz	-	756	1122	1140	732
Sound pressure level LpA at 3 m	dB(A)	25	29	30	25
Weight	kg	6.4			
Ambient air temperature min	°C	1			
Ambient air temperature max	°C	40			
Ingress protection rating	-	IPX2			
Article	-	8031137			

## Dimensions

$\varnothing D$	$\varnothing d$	L1	L2	A	B	C	E	H	h	a	b
148	98	100	45	330	258	260	395	188	62	208	123

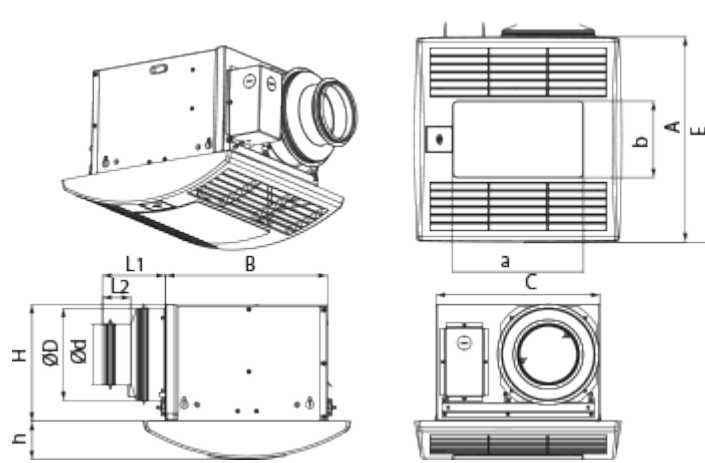

## Ecodesign

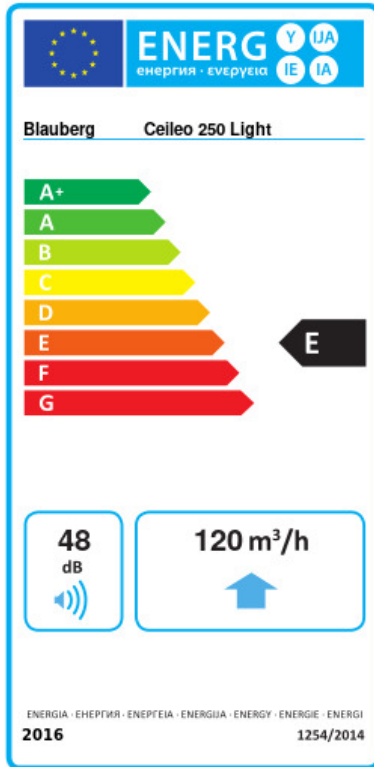

Trademark	Blauberg					
Model	Ceileo 250 Light					
Specific energy consumption (SEC) (kWh/(m²/a))	Cold	Average	Warm			
	-28.6	B	-12.2	E	-2.8	F
Type of ventilation unit	Unidirectional					
Type of drive installed	2-speed					
Type of heat recovery system	None					
Maximum flow rate (m³/h)	120					
Electric power input (W)	36					
Reference flow rate (m³/s)	0.037					
Reference pressure difference (Pa)	50					
Specific power input (SPI) (W/(m³/h))	0.159					
Control typology	Manual control					
Maximum external leakage rates (%)	2.7					
Declared typology	RVU UVU					
Sound power level (dB(A))	48					
The annual electricity consumption (AEC) (kWh/a)	Cold	Average	Warm			
	199	199	199			
The annual heating saved (AHS) (kWh/a)	Cold	Average	Warm			
	3355	1715	776			

## Accessories

### Speed control switches

Name	Photo	Description
<a href="#">CDP-2/10</a>		Multi-speed switch

### Flexible ducts

Name	Photo	Description
------	-------	-------------