

# Ceileo DC 110 T

Centrifugal extract low-noise and low-watt fans for ceiling mounting




- Maximum airflow: 187
- Sound pressure level LpA at 3 m: 25
- Motor type: DC
- Impeller type: Centrifugal forward curved blades
- Casing material: Galvanized steel
- Backdraft protection: Backdraft damper
- Timer: Turn off timer

	Unit of measurement	Ceileo DC 110 T
Connected air duct size	mm	150/100
Speed	-	1
Minimum supply voltage	V	120
Maximum supply voltage	V	240
Power supply frequency	Hz	50/60
Rated power	W	19
Unit current	A	0.18
Maximum airflow	m <sup>3</sup> /h	187
rotation speed at 50hz	-	1100
Sound pressure level LpA at 3 m	dB(A)	25
Weight	kg	5.3
Ambient air temperature min	°C	1
Ambient air temperature max	°C	40
Ingress protection rating	-	IPX2


## Dimensions

Ø D	Ø d	L1	L2	A	B	C	E	H	h
148	98	100	45	330	258	260	395	188	18

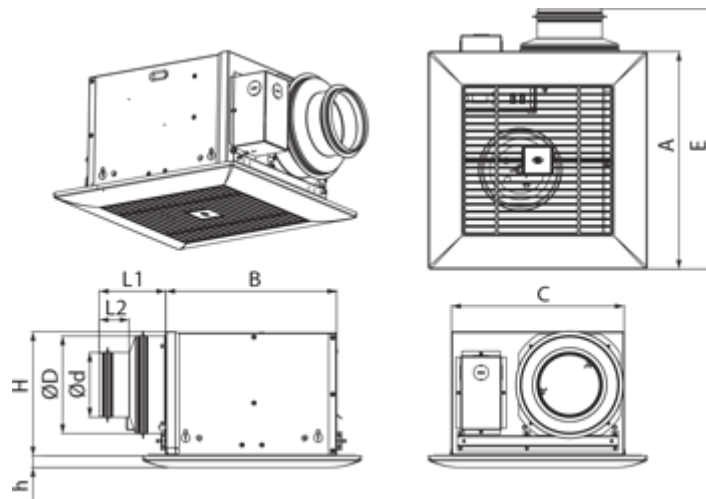



## Accessories

### Speed control switches

Name	Photo	Description
<a href="#">CDP-2/10</a>		Multi-speed switch

### Hoods

Name	Photo	Description
<a href="#">Decor S 102 HK</a>		Metal hoods
<a href="#">Decor S 152 HK</a>		Metal hoods

### Flexible ducts

Name	Photo	Description
<a href="#">BlauFlex PVC</a>		Flexible air ducts BlauFlex