







Centro 200 GI1

Centrifugal inline fans in plastic casings

- Maximum airflow: 780
- Sound pressure level LpA at 3 m: 46
- Motor type: AC
- Control: Built-in speed controller
- Impeller type: Centrifugal impeller with backward curved blades
- Casing material: Plastic
- Installation in any position
- Cable with mains plug
- Temperature sensor


	Unit of measurement	Centro 200 GI1	
Connected air duct size	mm	200	
Speed	-	1	
Phases	-	1	
Minimum supply voltage	V	230	
Maximum supply voltage	V	230	
Power supply frequency	Hz	50	60
Rated power	W	107	
Unit current	A	0.49	
Maximum airflow	m ³ /h	780	
Sound pressure level LpA at 3 m	dB(A)	46	
Weight	kg	3	
Transported air temperature (max)	°C	50	
Transported air temperature (min)	°C	-25	
Ingress protection rating	-	IPX4	
Ingress protection rating of the drive	-	IP44	

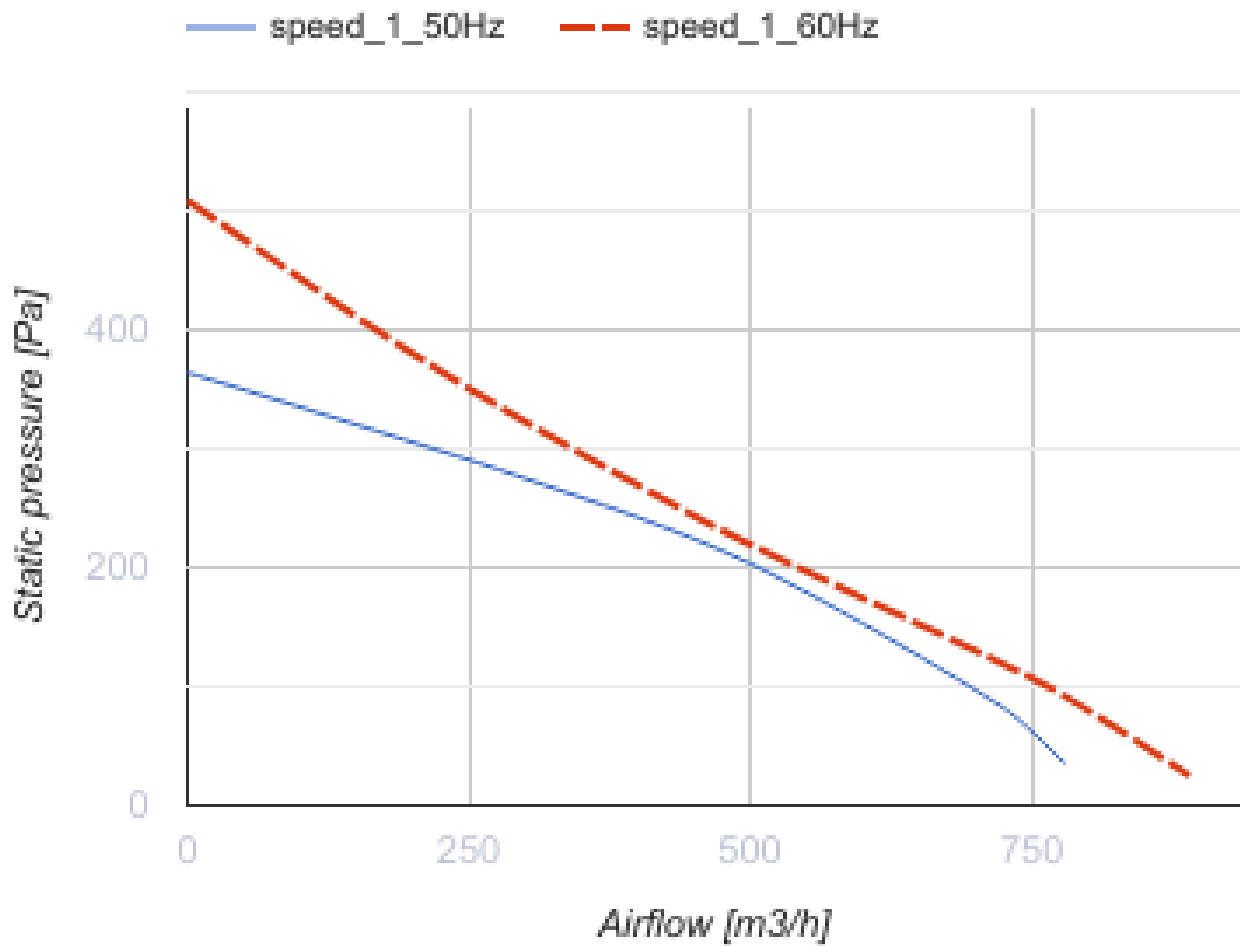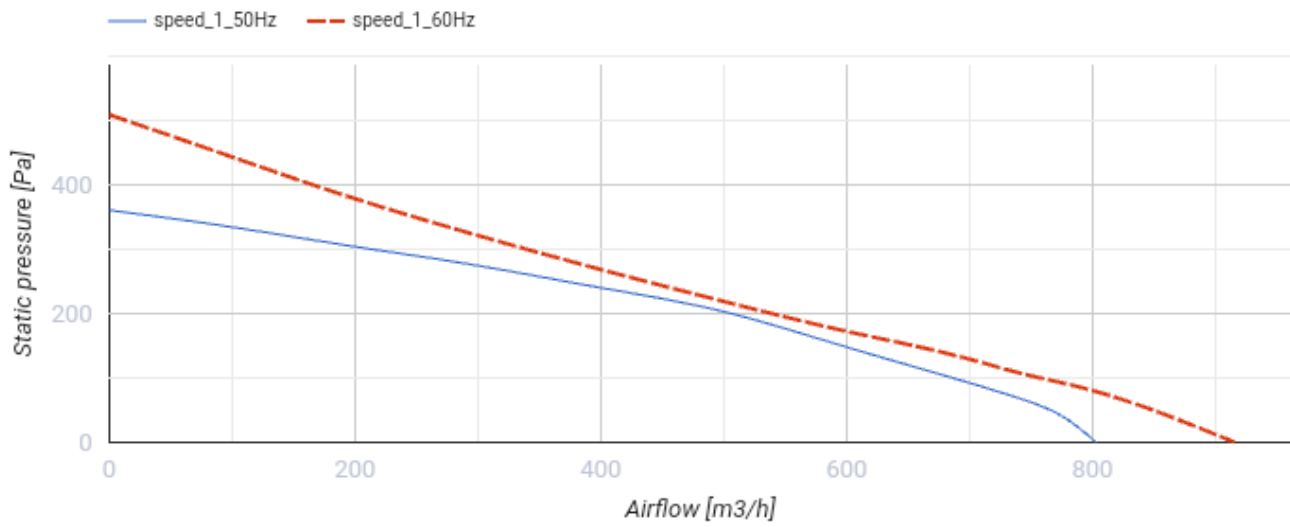

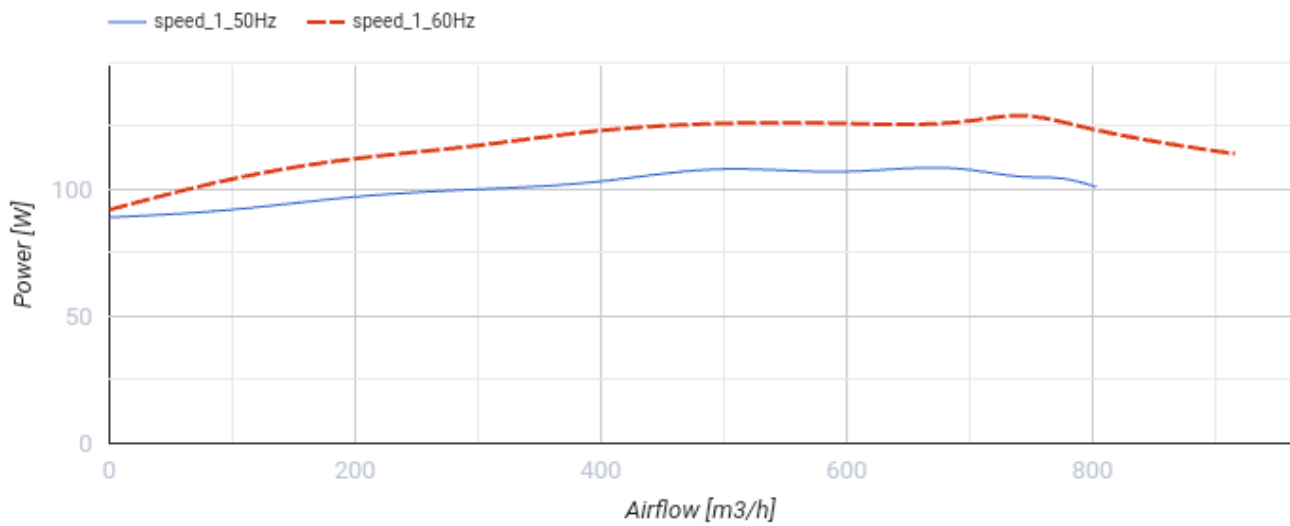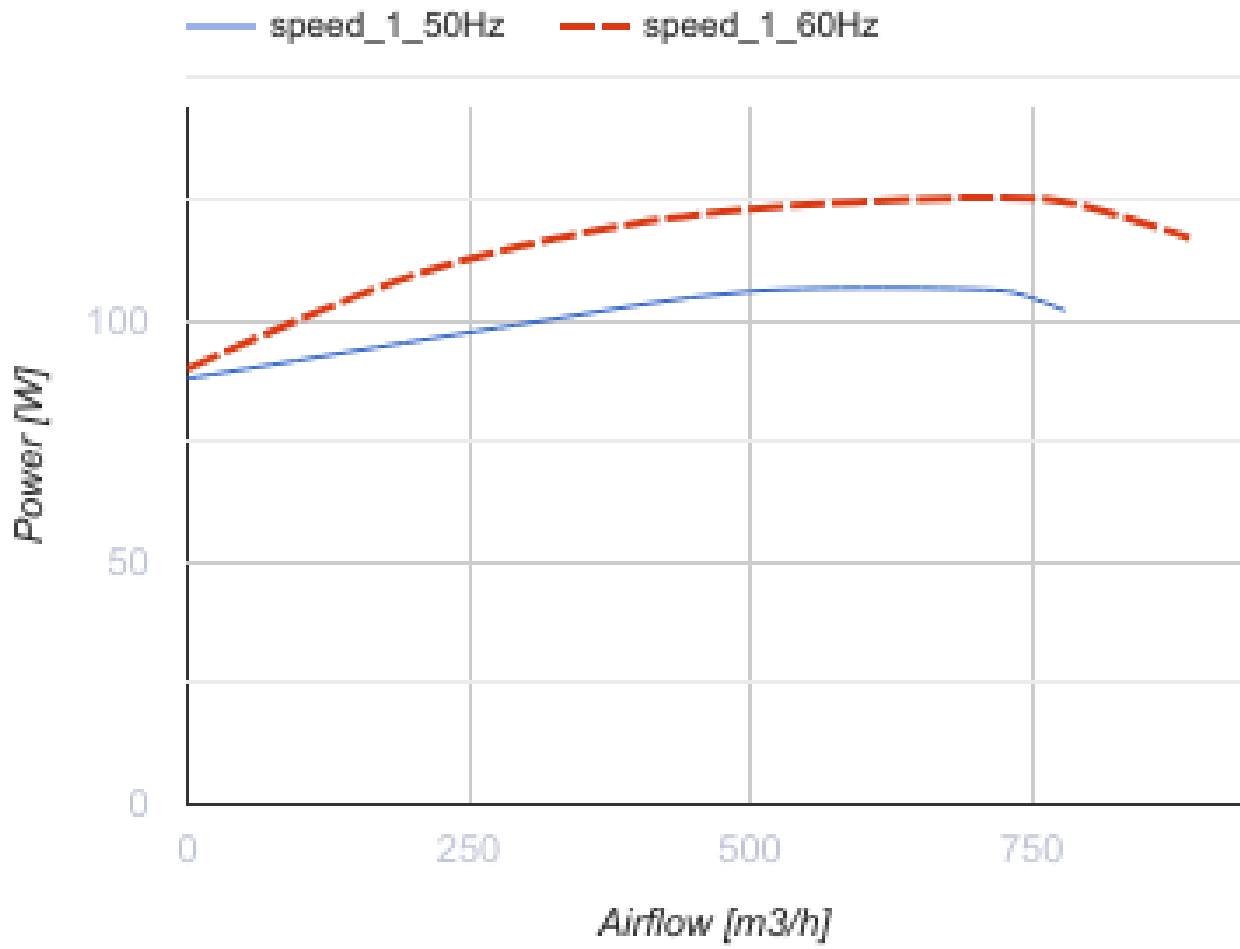



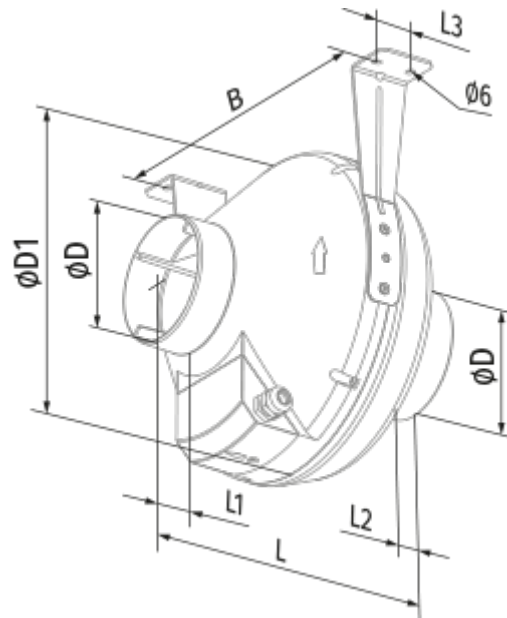


Dimensions

ØD	ØD1	B	L	L1	L2	L3
200	340	354	276	30	30	40



CDT1 E1.5		Multi-speed switches
CDT1 E0.5		Multi-speed switches
CDTE E3.0 TP		Speed controllers
CDTE E5.0 TP		Speed controllers
CDTE E10.0 TP		Speed controllers