





Centro EC 100

Inline centrifugal fans with EC motor

- Maximum airflow: 340
- Sound pressure level LpA at 3 m: 40
- Motor type: EC
- Impeller type: Centrifugal backward curved blades
- Casing material: Plastic
- Installation in any position

	Unit of measurement	Centro EC 100
Connected air duct size	mm	100
Speed	-	1
Minimum supply voltage	V	230
Maximum supply voltage	V	230
Power supply frequency	Hz	50/60
Rated power	W	82
Unit current	A	0.62
Maximum airflow	m ³ /h	340
Sound pressure level LpA at 3 m	dB(A)	40
Weight	kg	2
Transported air temperature (max)	°C	60
Transported air temperature (min)	°C	-25
Ingress protection rating	-	IPX4
Ingress protection rating of the drive	-	IP55

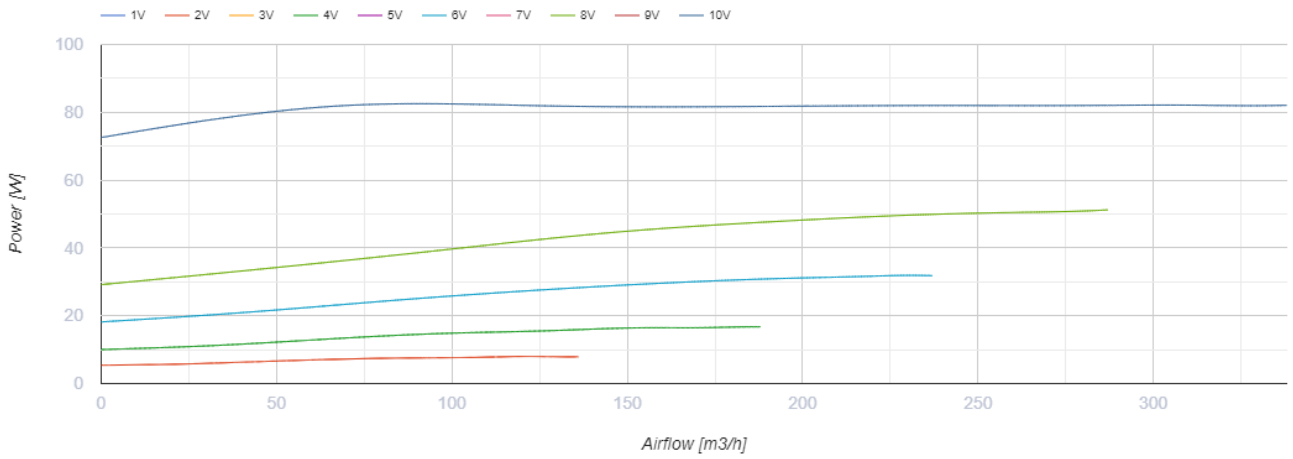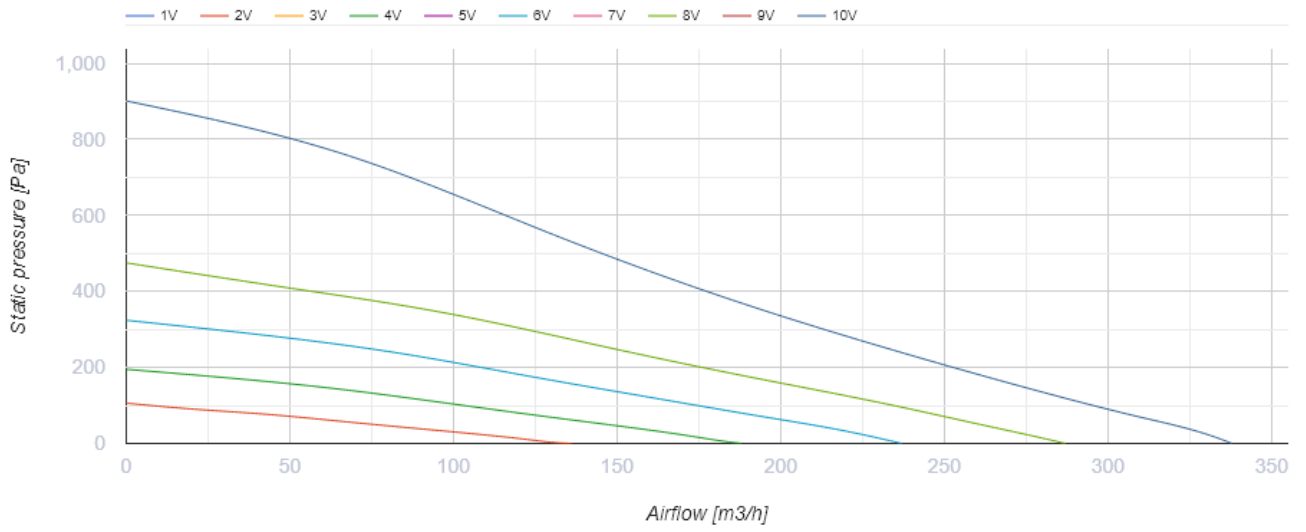


Dimensions

ØD	ØD1	B	L	L1	L2	L3
100	250	270	230	30	27	30



Ecodesign

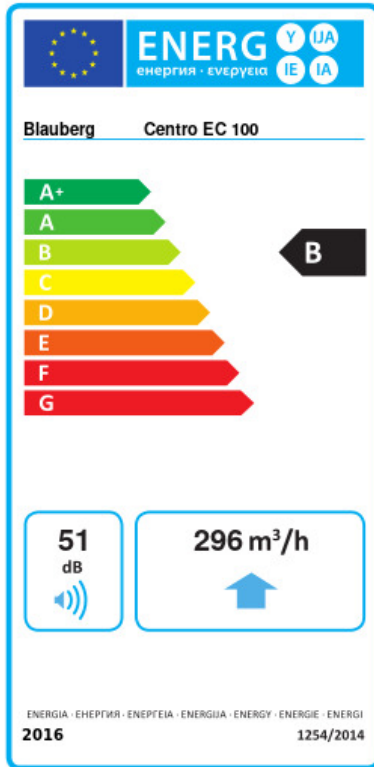

Trademark	Blauberg			
Model	Centro EC 100			
Specific energy consumption (SEC) (kWh/(m ² /a))	Cold	Average	Warm	
	-53.5	A+	-26.4	B -10.9 E
Type of ventilation unit	Unidirectional			
Type of drive installed	Variable speed			
Type of heat recovery system	None			
Maximum flow rate (m ³ /h)	296			
Electric power input (W)	82			
Reference flow rate (m ³ /s)	0.058			
Reference pressure difference (Pa)	50			
Specific power input (SPI) (W/(m ³ /h))	0.143			
Control typology	Local demand control			
Maximum external leakage rates (%)	2.7			
Declared typology	RVU UVU			
Sound power level (dB(A))	51			
The annual electricity consumption (AEC) (kWh/a)	Cold	Average	Warm	
	76	76	76	
The annual heating saved (AHS) (kWh/a)	Cold	Average	Warm	
	5536	2830	1280	

Accessories

EC motors regulators

Name	Photo	Description
CDT E/0-10		Speed control for EC motors