


Iso-Primo EC 355

Mixed-flow inline fans in sound-insulated casings with EC-motors





- Maximum airflow: 3500
- Sound pressure level LpA at 3 m: 48
- Sound insulation
- Motor type: EC
- Impeller type: Mixed-flow
- Casing material: Galvanized steel
- Installation in any position

	Unit of measurement	Iso-Primo EC 355
Connected air duct size	mm	355
Speed	-	1
Phases	-	1
Minimum supply voltage	V	230
Maximum supply voltage	V	230
Power supply frequency	Hz	50/60
Rated power	W	353
Unit current	A	1.56
Maximum airflow	m ³ /h	3500
rotation speed at 50hz	-	2470
Sound pressure level LpA at 3 m	dB(A)	48
Weight	kg	20.7
Transported air temperature (max)	°C	55
Transported air temperature (min)	°C	-25
Ambient air temperature min	°C	1
Ambient air temperature max	°C	40
Ingress protection rating	-	IPX4
Ingress protection rating of the drive	-	IP44

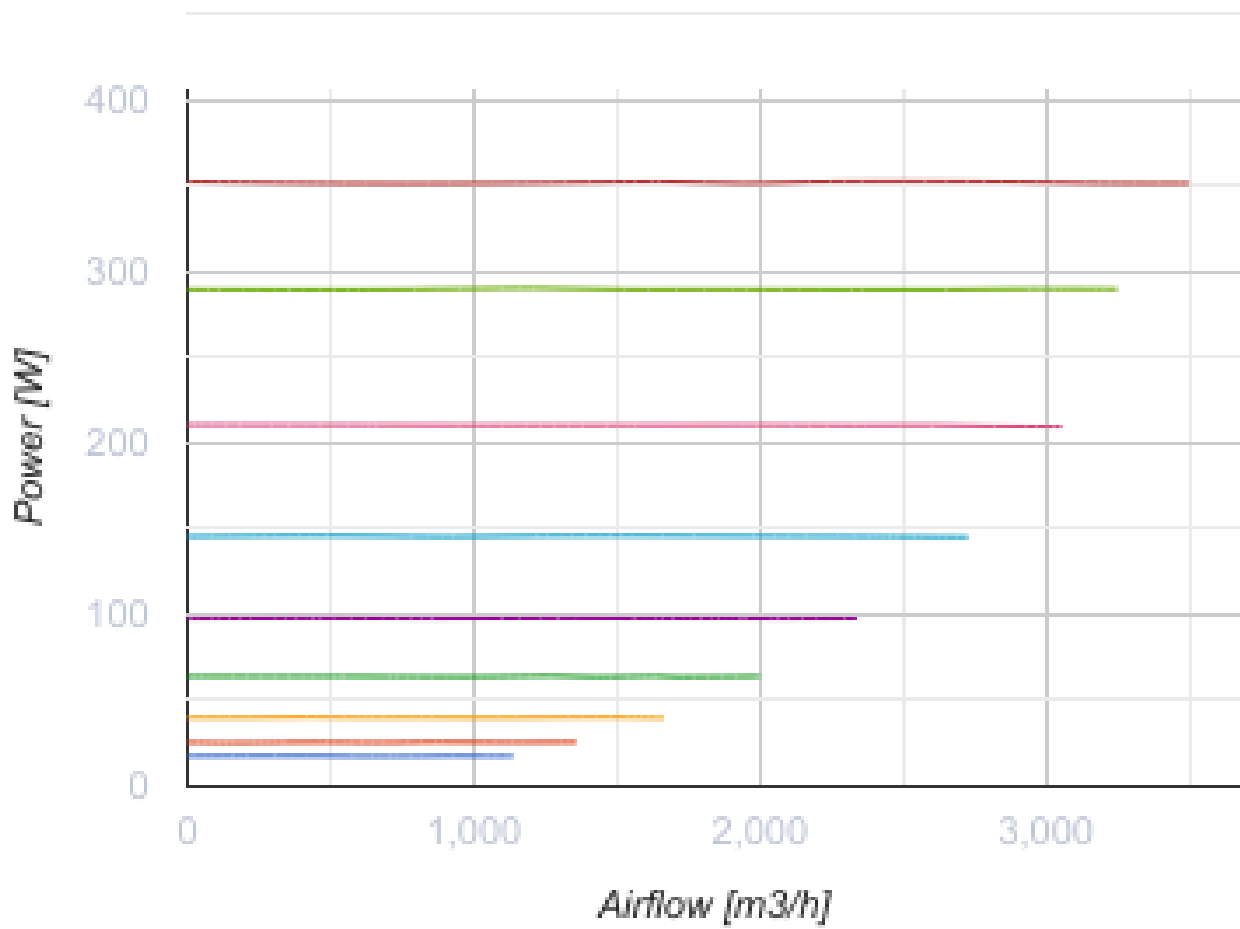

Dimensions

Ø D	Ø D1	H	L	L1
354	412	471	601	739

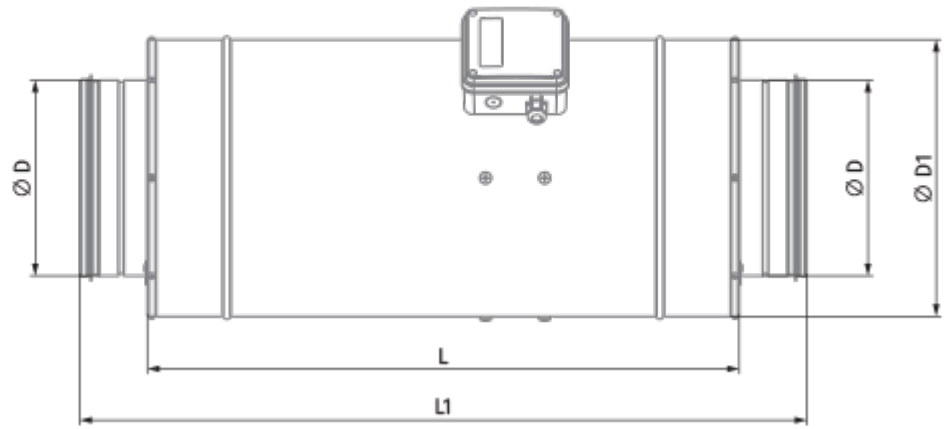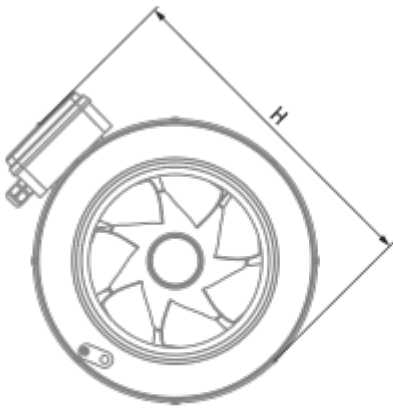


Ecodesign


Trademark	Blauberg
Model	Iso-Primo EC 355
Type of ventilation unit	Unidirectional
Type of drive installed	Integrated VSD
Type of heat recovery system	None
Nominal flow rate (m ³ /s)	0.733
Nominal external pressure (Pa)	200
Maximum external leakage rates (%)	2.7
Static efficiency (%)	42.8
Effective electric power input (kW)	0.35
Sound power level (dB(A))	68
Declared typology	NRVU UVU

Accessories



Other accessories

Name	Photo	Description
CDT E/0-10		Speed control for EC motors

Other accessories

Name	Photo	Description
VKA 355		Air dampers for round ducts

Other accessories

Name	Photo	Description
SD 355/1200		Silencers for round ducts
SD 355/900		Silencers for round ducts

[SD 355/600](#)



Silencers for round ducts