




KOMFORT EC SB 160-E S21

Heat and humidity recovery air handling units

- Maximum airflow: 200
- Sound pressure level LpA at 3 m: 24
- Heat exchanger type: Counter flow
- Extract filter: G4
- Supply filter: F7 (option: G4), F7 (опция: G4)
- Sound insulation
- Motor type: EC
- Enthalpy heat exchanger
- Bypass: Auto
- Reheater: Optional
- Preheater: Optional
- BMS protocol: ModBus
- Control: Smartphone
- Casing material: Coated steel
- Humidity sensor: Optional
- CO2 sensor: Optional
- VOC sensor: Optional
- PM2.5 sensor: Optional


	Unit of measurement	KOMFORT EC SB 160-E S21
Connected air duct size	mm	125
Speed	-	1
Phases	-	1
Minimum supply voltage	V	230
Maximum supply voltage	V	230
Power supply frequency	Hz	50/60
Rated power	W	57
Unit current	A	0.5
Maximum airflow	m ³ /h	200
Sound pressure level LpA at 3 m	dB(A)	24
Heat recovery efficiency, max	%	92
Heat exchanger type	-	Counter flow
Heat exchanger material	-	Enthalpy
Weight	kg	36
Extract filter	-	G4
Supply filter	-	F7 (option: G4), F7 (опция: G4)
Transported air temperature (max)	°C	40
Transported air temperature (min)	°C	-25
Ambient air temperature min	°C	1

Ambient air temperature max	°C	40
Ambient air humidity max	%	60
Ingress protection rating	-	IP20
Ingress protection rating of the drive	-	IP44

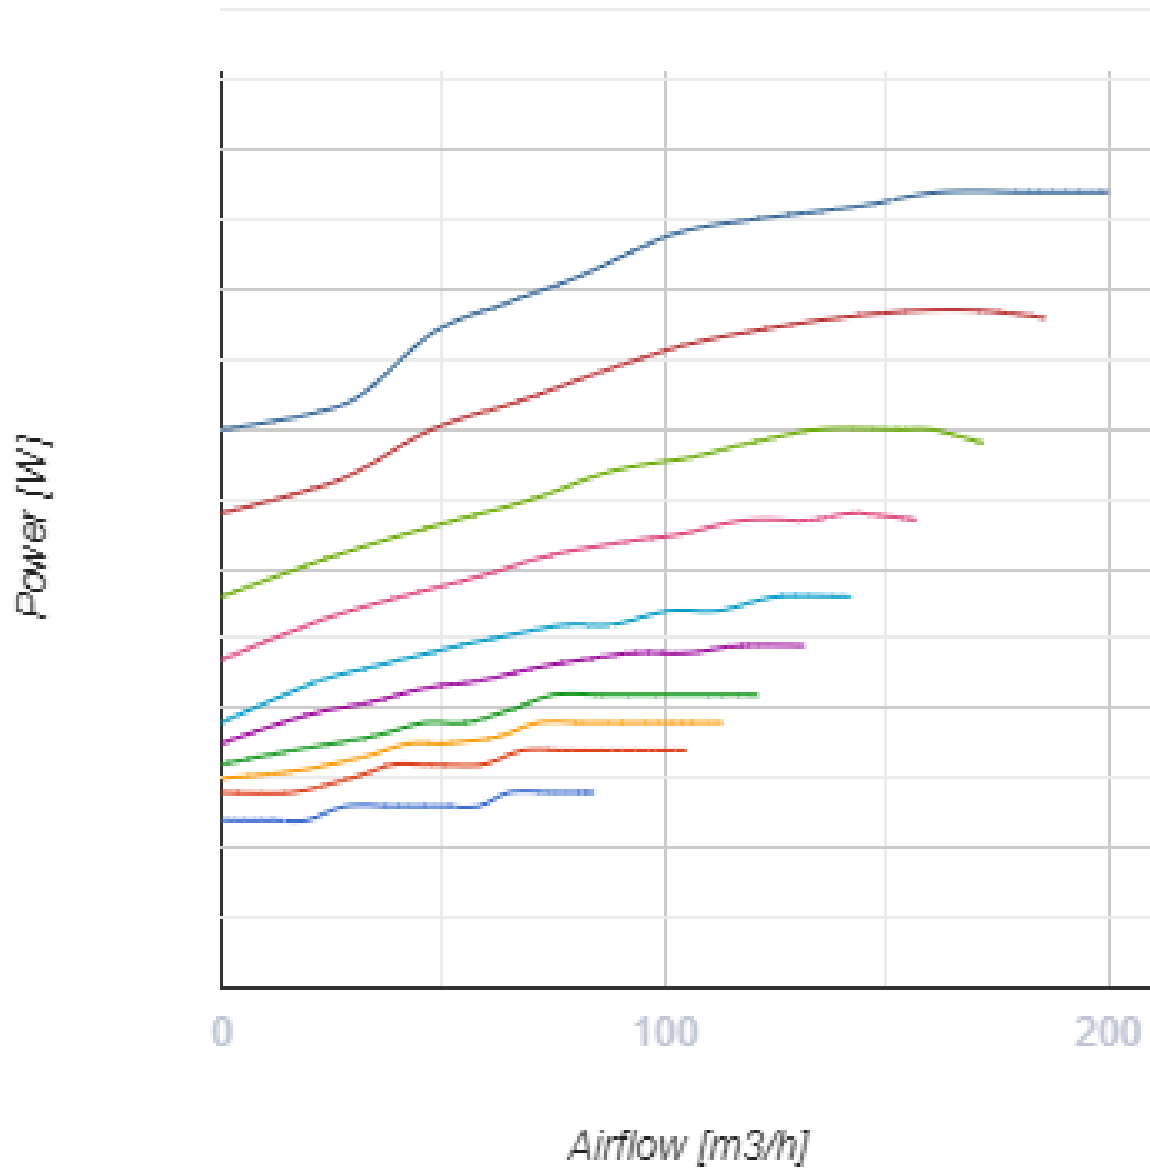


Dimensions

D	B	H	L
125	330	580	600

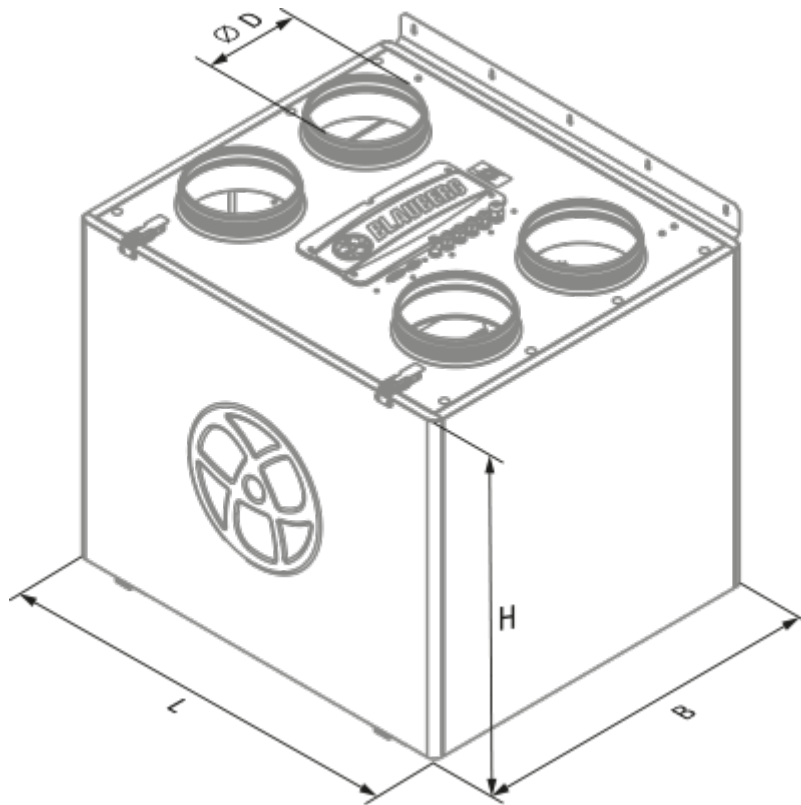

Ecodesign

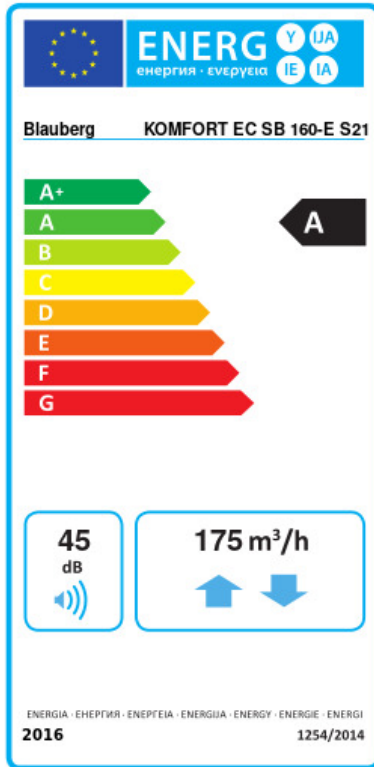


Trademark	Blauberg					
Model	KOMFORT EC SB 160-E S21					
Specific energy consumption (SEC) (kWh/(m ² /a))	Cold		Average		Warm	
	78.7	A+	41.4	A	17.3	E
Type of ventilation unit	Bidirectional					
Type of drive installed	Variable speed					
Type of heat recovery system	Recuperative					
Thermal efficiency of heat recovery (%)	79					
Maximum flow rate (m ³ /h)	175					
Electric power input (W)	57					
Reference flow rate (m ³ /s)	0.036					
Reference pressure difference (Pa)	50					
Specific power input (SPI) (W/(m ³ /h))	0.215					
Control typology	Local demand control					
Maximum internal leakage rates (%)	2.7					
Maximum external leakage rates (%)	2.7					
Sound power level (dB(A))	45					
Declared typology	RVU BVU					
The annual electricity consumption (AEC) (kWh/a)	Cold		Average		Warm	
	696		159		114	
The annual heating saved (AHS) (kWh/a)	Cold		Average		Warm	
	8736		4466		2019	




Accessories

Other accessories


Name	Photo	Description
FP 285x195x10 F7		F7 panel filter

FP 285x195x10 G4		G4 panel filter
------------------	---	-----------------


Control Panels

Name	Photo	Description
S22		Control panels
S22 Wi-Fi		Control panels
S25		LCD control panel


Humidity sensors

Name	Photo	Description
FS2		Humidity sensor

CO2 sensors

Name	Photo	Description
CD-1		CO2 sensors
CD-2		CO2 sensors

Other accessories


Name	Photo	Description
DAH 251-13		Kitchen exhaust hood

Electrical heaters


Name	Photo	Description
------	-------	-------------

EVH 125-0.6-1 S21 V.2		Electric duct preheater for heat exchanger freeze protection
EVH 125-0.8-1 S21 V.2		Electric duct preheater for heat exchanger freeze protection
EVH 125-1.2-1 S21 V.2		Electric duct preheater for heat exchanger freeze protection
ENH 125-0.6-1 S21 V.2		Duct heater for supply air reheating
ENH 125-0.8-1 S21 V.2		Duct heater for supply air reheating
ENH 125-1.2-1 S21 V.2		Duct heater for supply air reheating

For round ducts

Name	Photo	Description
VKA 125		Air dampers for round ducts

Electric actuators

Name	Photo	Description
Belimo TF230		Electric actuators